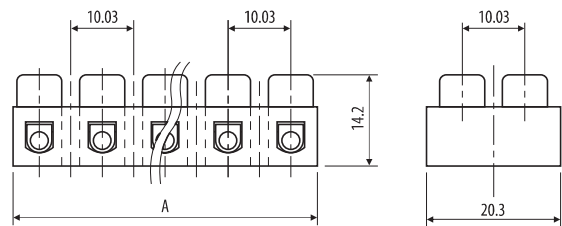
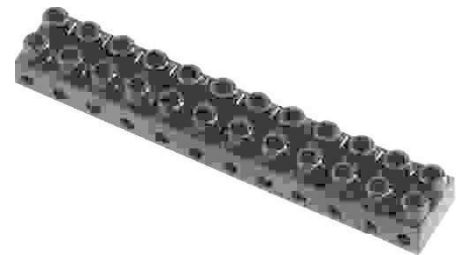


- Characteristics**
- Moulded in phenolic material
  - Available in enclosed terminals
  - Available in 2, 3, 4, 6, 8, 10, & 12 No. of ways

Ordering code	No. of ways	A
TPB 6/2	02	20.07
TPB 6/3	03	30.10
TPB 6/4	04	40.13
TPB 6/6	06	60.20
TPB 6/8	08	80.26
TPB 6/10	10	100.33
TPB 6/12	12	120.44


**TECHNICAL DATA:**

Terminals	Closed terminals
Electrical ratings	6A, 500V AC
Breakdown voltage	2.0 KV AC for 1 min. between adjacent terminals and 2.5 KV AC between terminals & insulator
Wire size	1.5 Sq. mm. (max.)

**MATERIALS :**

Housing	Phenol formaldehyde (bakelite)
Terminal	Copper alloy nickel plated
Screws	Steel zinc plated, yellow chromated

Note : For terminal strips with brass screws and washers, consult factory.

All dimensions are in mm.  
 Due to continuous improvement in products, we reserve the right to alter specifications without prior notice