


Two pole / Four pole, Screw terminal sockets




Approval



Ordering code	HDS08 2 Pole
Rating	10 A, 240V AC
Mounting	DIN rail EN 50022, Two M4 screws

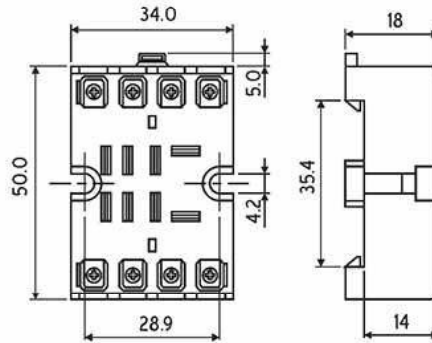

Ordering code	ERS14M 4 Pole	* ERS08M 2 Pole
Rating	5 A, 240V AC	
Mounting	DIN rail EN 50022, Two M4 screws	

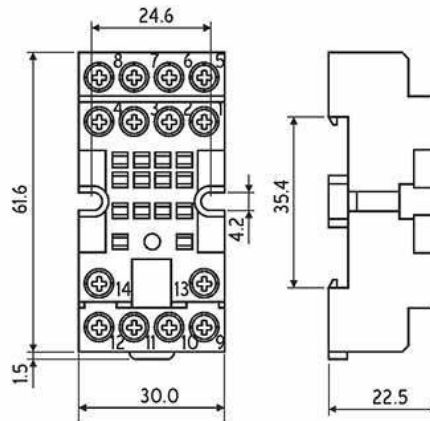

Standard conformity	EN 60947-5-1 IEC 947-5-1
Material	Flame retardant thermoplastic material (UL94V-0)
Colour	Black
Dielectric strength	2000V AC rms. for 1 minute
Insulation resistance	1000Mohms min. at 500V DC
Temperature range	-45°C to +120°C
Terminals	M3 screws with captive washers

Note : Retaining clip RC1 available for HDS08 Series relay sockets.
Retaining clip RC2 available for ERS14M Series relay sockets.

*ERS14M socket without pins in cavities 2, 3, 6, 7, 10 & 11

Add suffix 'C' for relay sockets with retaining clip. Ordering code 2 pole socket : HDS08C
4 pole socket : ERS14MC

All dimensions are in mm.
Due to continuous improvement in products, we reserve the right to alter specifications without prior notice