

### Miniature relay sockets




Approval




Ordering code **MRS 05**  
(5 Pin socket)

Air-distance >3.5 mm.  
Creep-distance >3.0 mm.

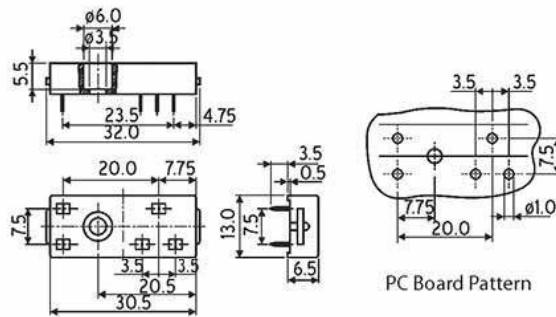

Ordering code **MRS 08**  
(8 Pin socket)

Air-distance >2.0 mm.  
Creep-distance >3.0 mm.

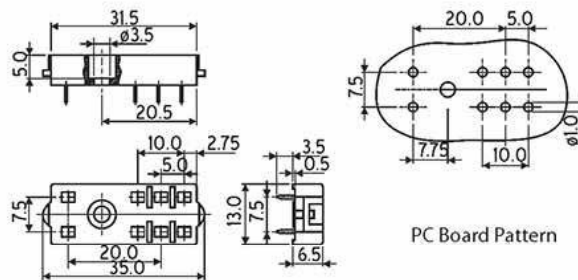

Standard conformity	EN 60947-5-1 IEC 947-5-1
Material	Flame retardant thermoplastic material (UL94V-O)
Colour	Black
Rating	5A AC/DC, 250V rms.
Dielectric strength	2000V AC rms. for 1 minute
Insulation resistance	1000Mohms min. at 500V DC
Temperature range	-45°C to +120°C
Terminals	PCB mounted

Note : Retaining clip (RCM) for miniature relay sockets are available.

\* Add suffix 'C' for relay sockets with retaining clip. Ordering code 2 pole socket : MSR05C  
4 pole socket : MSR08C

All dimensions are in mm.  
Due to continuous improvement in products, we reserve the right to alter specifications without prior notice