




PILOT LAMP HOLDERS

J - SERIES

- Characteristics
- Moulded from phenolic material
 - Designed to accept E-14 screw cap filament or neon miniature lamps of approx. 54 mm. length & 16 mm. dia
 - Unbreakable transparent polycarbonate lens suitable to resist temperatures as high as 130° C
 - Also available with polystyrene lens suitable for neon lamps only
 - Available in Red, Green, Yellow, Blue and clear colours (all transparent)

Ordering code

JS-7/*
(with normal bakelite cap)

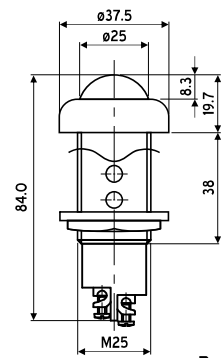


Panel Cutout $\phi 25.4$



Ordering code

JS-7/M/*
(with chrome plated metallic cap)

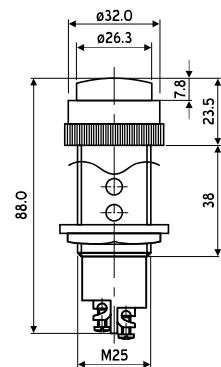

Panel Cutout $\phi 25.4$



Note

1. Add following suffix at * in the ordering code of pilot lamp holder for lens colour.
Red = R Blue = B
Green = G Clear = C
Yellow = Y
2. Green and Blue shades are not recommended for use with neon lamps in view of the colour distortion due to the yellowish discharge of the neon.
3. To order lamp holders with polystyrene lens, add suffix 'P'.
Thus JS-7 with polystyrene lens shall be ordered as JS-7/P.

All dimensions are in mm.


Due to continuous improvement in products, we reserve the right to alter specifications without prior notice



PILOT LAMP HOLDERS


J - SERIES

- Characteristics
- Suitable for E-10 (MES) screw capped miniature lamps, neon or filament
 - Available in Red, Green, Yellow, Blue and clear colours (all transparent)
 - Polystyrene lens is suitable for lamps of 1.5W with continuous duty and for lamps of 3.0W for intermittent duty



Ordering code **J-10/***
(with chrome plated brass body)

Panel cut out Ø19.5



Ordering code **JB-24/***
(with black phenolic moulded body)

Panel cut out Ø19.5

Note

1. Add following suffix at * in the ordering code of pilot lamp holder for lens colour.
Red = R Blue = B
Green = G Clear = C
Yellow = Y
2. Green and Blue shades are not recommended for use with neon lamps in view of the colour distortion due to the yellowish discharge of the neon.

All dimensions are in mm.
Due to continuous improvement in products, we reserve the right to alter specifications without prior notice